

InstaKlik™ / EverTile™ Deck Tiles Installation Guide



When you receive Green Plank® products

Upon arrival check immediately your package for damages. And ALWAYS check the models, quality and quantity before starting to install/mount Green Plank® composite products.

Any claims of visible defects made after the assembly or modification are not acceptable. Green Plank® composite products should always be mounted by competent professionals. Green Plank® composites products should not be used for load bearing segments. To maintain warranty right, please always follow these installation instructions.

Safety:

When dealing with any type of construction project, it is necessary to wear appropriate protective clothing to avoid any risk of injuries. Cutting, grinding or sanding should be done outdoors or in a well-ventilated area.

Product information:

Each Green Plank® composite plank has a unique natural appearance. Because of the seemingly wooden structure several differences in color may appear. Since every tree is unique in its growth characteristics, wood as a natural product does not have an even structure.

Purchasing all required tiles material at one time is recommended, as manufacturing runs can produce slightly different colors.

Installation:

- Before installing the deck tiles, make sure your surface is clean, smooth, flat (less than 2% grade) structurally sound and water should run away from the deck.
- Start laying the tiles in rows and make sure they fully snap together on all four sides. If you're creating a pattern, it's a good idea to take a step back from time to time and check your progress.
- You can use a hand saw if a tile needs to be trimmed, but a motorized circular, chop, or jig saw with a carbide tipped blade works best.
- It's a good idea in general to try and keep your tiles free of debris and not drag heavy objects across them. For other care and maintenance follow the same tips recommended for Green Plank composite decking found at greenplank.eu.
- For curved or shaped cuts, it's a good idea to use a piece of cardboard as a guide.
- Before cutting, always turn the Deck Tile over and make sure that the cut lines you have marked on the Deck Tile do not cross over any screws on the black base. Never cut through the screws. If your lines cross over these screws, first unscrew the screws and then cut the Deck Tile.

Storage:

Store Green Plank® composite products under cover to maintain a clean surface. If stored outdoors, they must be covered with an opaque material. All products should be stored flat and on a dry surface. Stack units with banding and bottom supports aligned.


Acclimation:

Every material expands and contracts with temperature changes, and composite planks is no exception.

Expansion and contraction is not a product defect and not covered under the Green Plank warranty.

There must be at least a 12mm gap between walls or any solid building to allow expansion and contraction. Failure to do so could result in warping of the tile, buckling or other damage.

Dark color tiles under the strong sunlight become warmer and react faster than the light color tiles. One should bear in mind these properties at the time of installation and have a clear area for expansion.

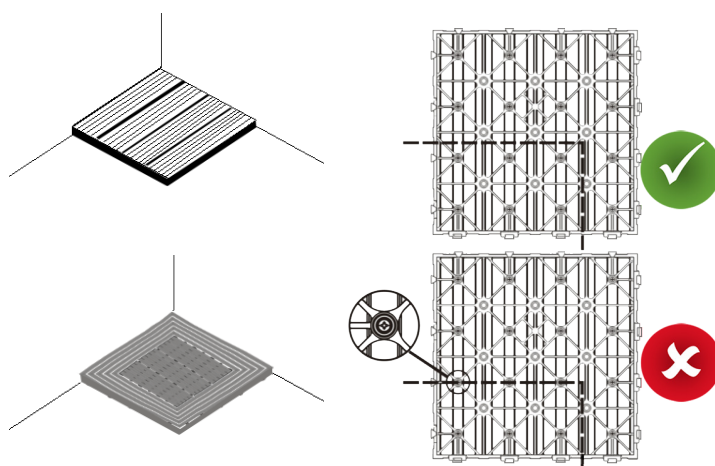

Install from one corner of the area

THE DIAGRAMS AND INSTRUCTIONS IN THIS GUIDE ARE FOR ILLUSTRATION PURPOSES ONLY AND ARE NOT MEANT TO REPLACE A LICENSED PROFESSIONAL. ANY CONSTRUCTION OR USE OF THE PRODUCT MUST BE IN ACCORDANCE WITH ALL LOCAL ZONING AND/OR BUILDING CODES. THE CONSUMER ASSUMES ALL RISKS AND LIABILITY ASSOCIATED WITH THE CONSTRUCTION OR USE OF THIS PRODUCT. THE CONSUMER OR CONTRACTOR SHOULD TAKE ALL NECESSARY STEPS TO ENSURE THE SAFETY OF EVERYONE INVOLVED IN THE PROJECT, INCLUDING, BUT NOT LIMITED TO, WEARING THE APPROPRIATE SAFETY EQUIPMENT. EXCEPT AS CONTAINED IN THE WRITTEN LIMITED WARRANTY, THE WARRANTOR DOES NOT PROVIDE ANY OTHER WARRANTY, EITHER EXPRESS OR IMPLIED, AND SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING CONSEQUENTIAL DAMAGES.